

SHENZHEN ABT ELECTRONICS CO., LTD.

Tel:86-755-89958277 Fax:86-755-89958274 Email:sales@SZABT.com Http://www.SZABT.com

SPECIFICATION		PREPARE	CHECK	APPROVE
MODEL:	USED IN:			
ISSUE DATE :	6/12/2008 1:55:00 PM			
COMMON/UNITE	DOC. NO:		REV.: 1.0	PAGE: 1 OF 1


L100-36 37V(10Serial) Li-Ion Battery pack charger

	ITEM	UNIT	SPECIFICATION	REMARK
INPUT				
01	Rating Input Voltage	V ac	100~240Vac 50/60Hz	
02	Input voltage range	V ac	90~264Vac	
03	Rating Input Current	A	1.5Arms	INPUT:100V OUTPUT:Full load
04	Max. input power	W	95	
OUTPUT				
05	Rating output voltage	V dc	42V	
06	Output voltage range	V dc	30VDC ~ 42VDC	
07	Suit with Battery type		37V (10Serial) 4~12Ah Li-Ion	
08	Charging current	A	1.9±0.1@41V	
09	Charging voltage	V	42V +0.2V	
10	Cut-off current	A	0.10~0.2A	
11	Typical charging time	hour	7-8 Hours	For 8000mAH
12	Max. output power	W	80W	
13	Hold-on time	ms	NC	Input: 220Vac Output: Full load
14	Ripple current (RMS)	mA	100	Input: 220Vac Output: Full load
15	Charge finish condition		V>41V + I<0.2A	
16	LED color		Red: charging Green: finish/idle Flashing: error (shorted or	
17	Output protect	-	OCP & OVP	
18	Efficiency	%	80%	At max. load
Environment				
19	Operate temperature	°C	-10 ~ +40	Full load & natural convection.
20	Operate humidity	%RH	< +90	Relative humidity, non-condensing.
21	Storage temperature	°C	-40 ~ +70	
22	Storage humidity	%RH	0 ~ +95	Relative humidity, non-condensing.
23	Cooling	-	Natural convection	
24	Temperature factor	%	--	
25	Vibration resistance		5MM/50HZ/600S	Non-operating condition.
26	Impact resistance		1 meter drop test >= 3 times	Non-operating condition.
Mechanical				
27	Weight	g	650	
28	Size	mm	170X71X51	Casing only
29	Connectors	-	Defined when order	
Safety				
30	Max. temperature rise	°C	< 40 on casing	At any line and Max. Load
31	Safety standards	-	EN60335-2-29 UL1310	
32	EMC standard	-	EN55014	
33	MTBF	hrs	30000	
34	Limited power source	VA	-	
35	ESD	kV	8.0	
36	Hi-Pot Insulation	V	i/p to o/p: 3000 (1 min.)	For final unit, cut-off current =10mA

SHENZHEN ABT ELECTRONICS CO., LTD.

Tel:86-755-89958277 Fax:86-755-89958274 Email:sales@SZABT.com Http://www.SZABT.com

SPECIFICATION		PREPARE	CHECK	APPROVE
MODEL:	USED IN:			
ISSUE DATE :	6/12/2008 1:55:00 PM			
COMMON/UNITE	DOC. NO:		REV.: 1.0	PAGE: 2 OF 1

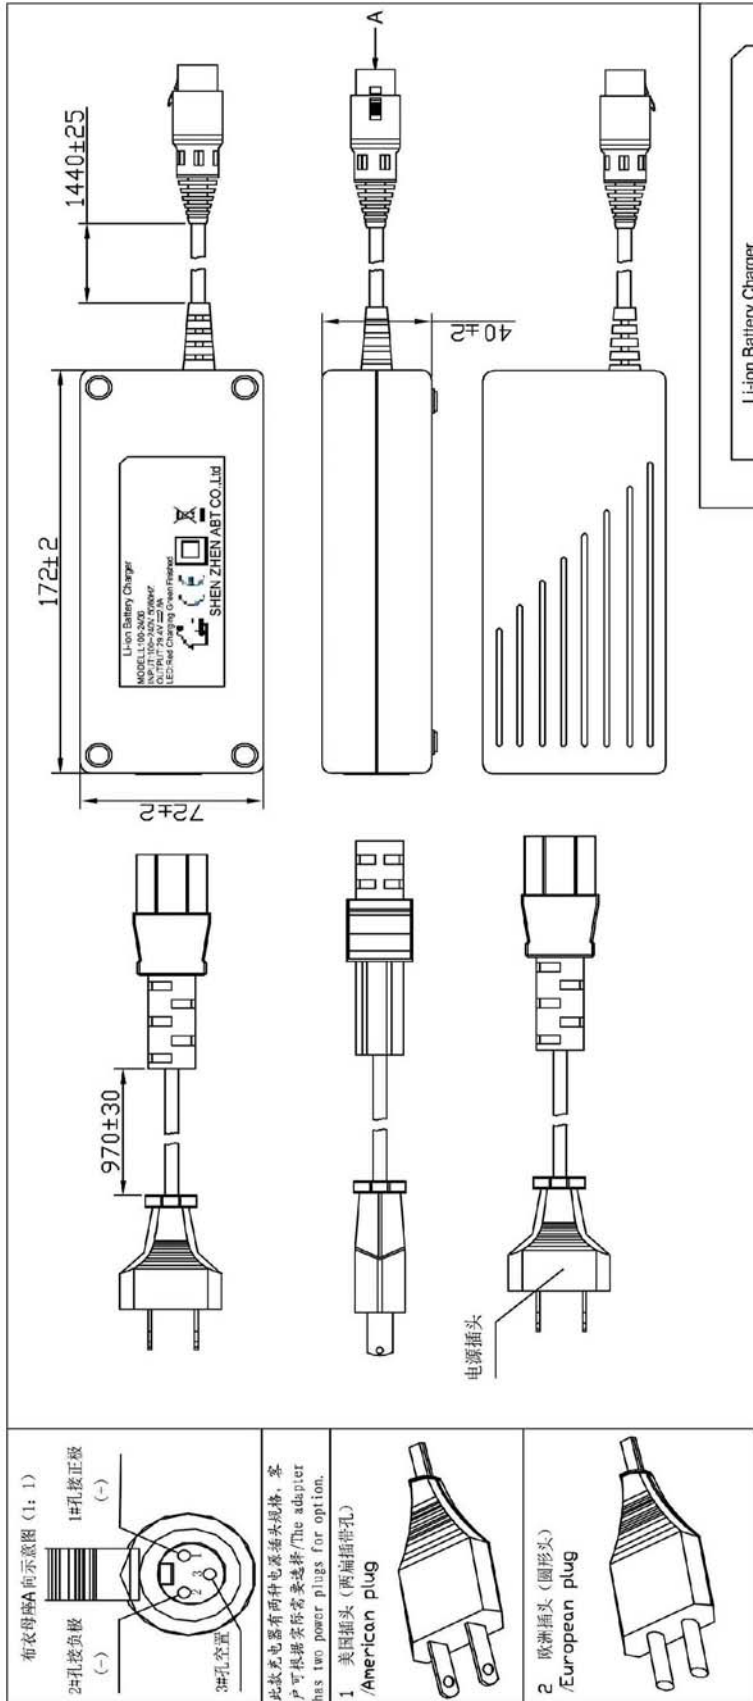

铭牌内容

Li-ion Battery Charger
 MODEL:L100-24/36
 INPUT:100-240V 50/60HZ
 OUTPUT:2.9-4V= 2.8A
 LED:Red Charging Green Finished

SHEN ZHEN ABT CO.,Ltd

CE, RoHS, and other certification symbols.

L100-24/36		充电器		锂聚合物电池	
客户		数量	重量	比例	
通用客户				1:3	
共		张	第	张	
				AE00-531	
1	增加垃圾桶				
2	更改前内容				
3	样板设计				
4	复核				
5	版本	A1			
6	日期	08/4/23			
7	审批				

深圳奥博特电子有限公司

AE00-531